
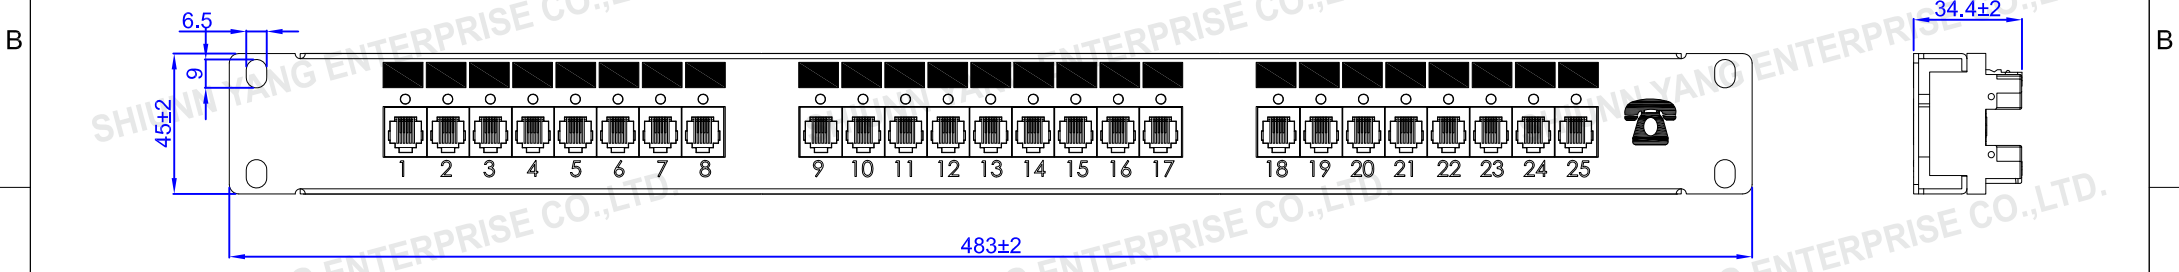


ROHS Compliant

DATE	2015/11/04
Revision	B

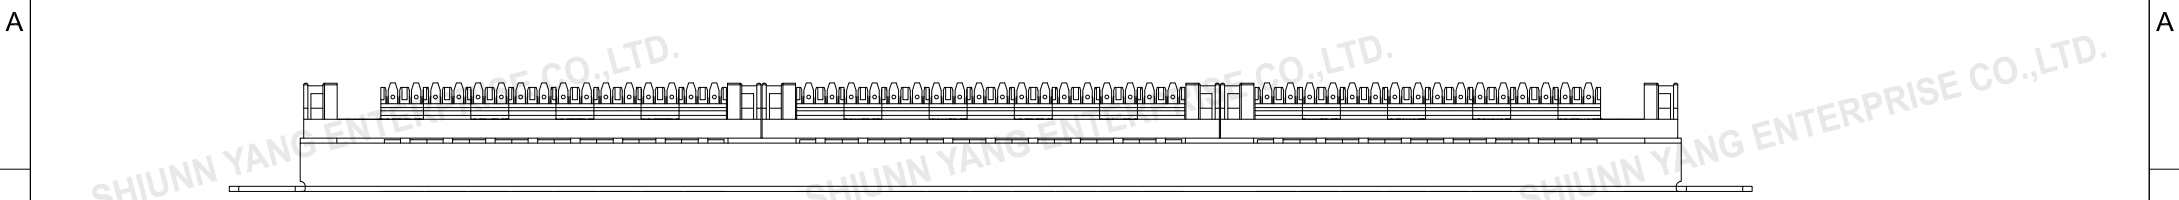

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

- |  |   |
|--|---|
| <b>Features :</b> <ul style="list-style-type: none"> <li>• Provides termination for 22~26AWG wire</li> <li>• Jack insertion life &gt; 750 mating cycles</li> <li>• IDC insertion life &gt; 250 mating cycles</li> <li>• Operating temperature : -40°C ~ +60°C</li> </ul> | <b>Electrical :</b> <ul style="list-style-type: none"> <li>• Contact resistance : 20m ohm</li> <li>• DC Current rating : 1.5Amps</li> <li>• DC resistance : Max.0.1 ohm</li> <li>• Insulation Resistance : 500m ohm</li> <li>• Dielectric withstanding voltage : 1000V</li> <li>• Voltage : 150V</li> </ul> |
|--|---|

MATERIAL				<b>P/NO. SY-509-25</b>		
CATEGORY	<input type="checkbox"/> CAT.5E <input type="checkbox"/> CAT.6 <input checked="" type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____			ITEM. Patch Panel	CO. SY	S/N. SY-509-25
FRAME	Aluminum, Black anodized			DR. Mark 2015/11/04	APPD.	CHKD.
IDC CONTACT	PHOSPHOR BRONZE WITH 200U" TIN OVER NICKEL	IDC PLASTIC	PC, UL 94-V0	<p>Shiunn Yang Ent.Co.Ltd. TEL: 29089890 &lt;REP&gt; FAX: 29068849,29088679</p>		
PCB JACK HOUSING	STANDARD MATERIAL 15% GLASS FILLED PBT,UL94V-0					
PCB JACK CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL					
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch <input checked="" type="checkbox"/> 0.15 um / 6u inch <input type="checkbox"/> 0.38 um / 15u inch <input type="checkbox"/> 0.76 um / 30u inch <input type="checkbox"/> 1.27 um / 50u inch					
TYPE OF PRODUCT	<input checked="" type="checkbox"/> UNSHIELD <input type="checkbox"/> SHIELD : STAINLESS COVER			UNIT mm	SCALE /	SIZE A4