


ROHS Compliant

|          |            |
|----------|------------|
| DATE     | 2012/11/06 |
| Revision | A          |

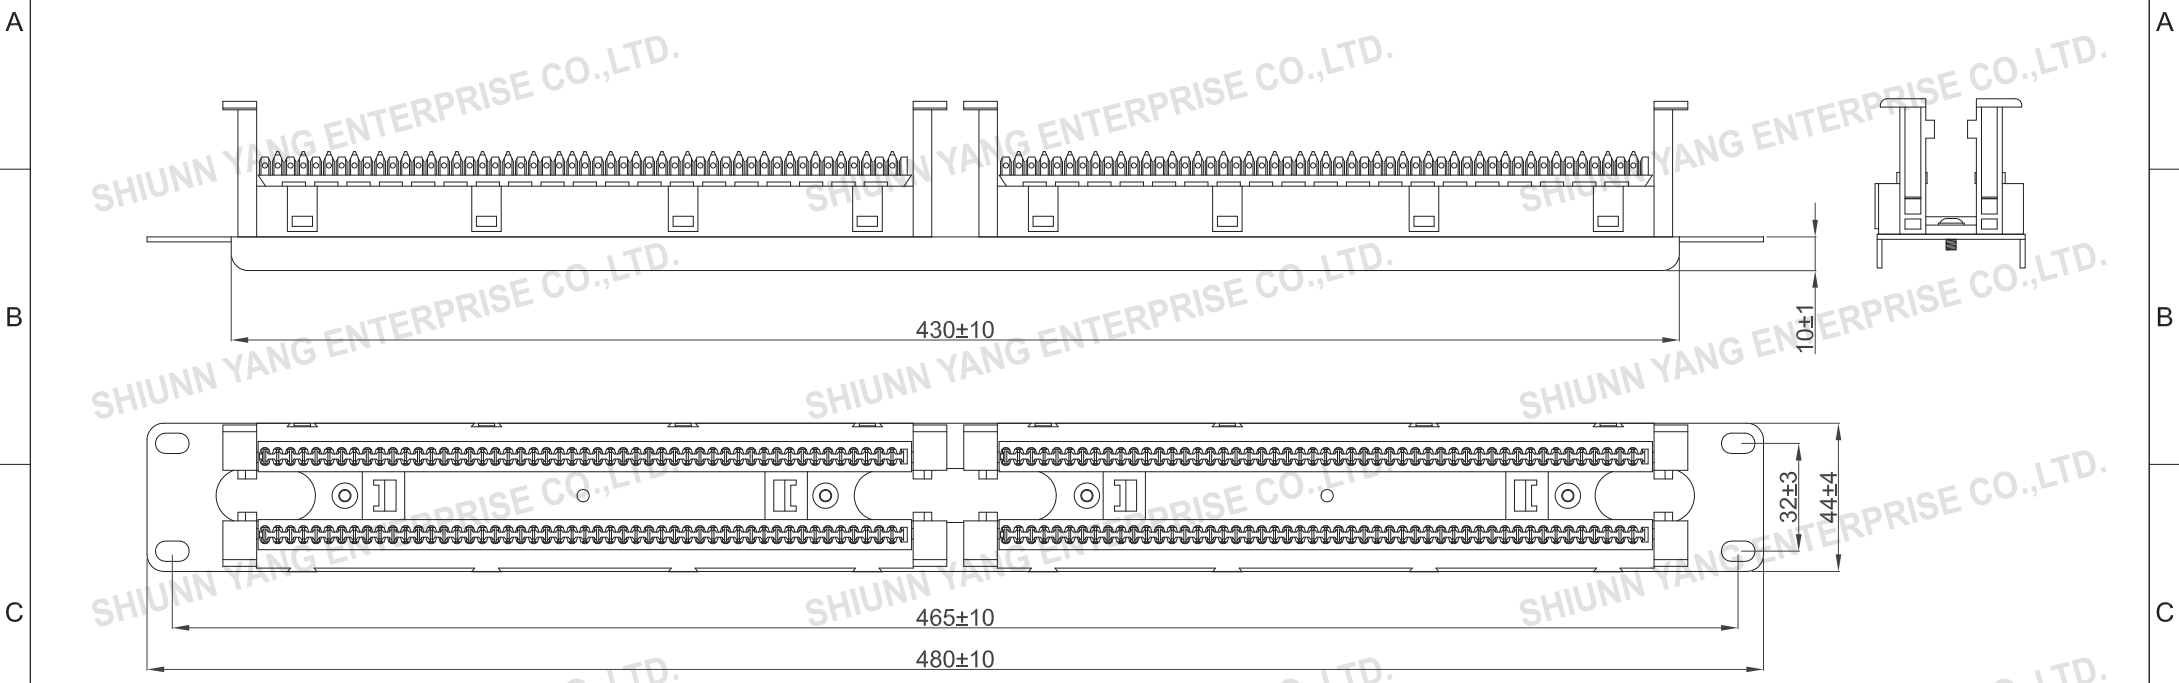

**Features :**

- 110 IDC connector compatible
- Provides termination for 22~26 AWG wire
- IDC insertion life >250 mating cycles
- Operating temperature : -40°C~+60°C

**Electrical :**

- Contact resistance : 20M ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

| TOLERANCE |      |
|-----------|------|
| .XXXX     | ---- |
| .XXX      | 0.10 |
| .XX       | 0.25 |
| .X        | 0.38 |

| MATERIAL    |   |      |          |
|-------------|---|------|----------|
| PLASTIC     | PC UL94V-0  |      |          |
| METAL FRAME | SPCC  |      |          |
| EXCLOSURE   | ID LABEL HOLDER x 2PCS , ID LABEL x 2PCS , CABLE TIE x 4PCS |      |          |
| ACCESSORIES | 4pair 110 connector x 20pcs , 5pair 110 connector x 4pcs    |      |          |
| REV.        | DESCRIPTION   | ENG. | APPROVAL |
| 1           | 2   | 3    | 4        |

|  |        |   |
|--|--------|---|
| <b>P/NO. SY-110-100RM-A</b>  |        |   |
| ITEM.110 System Solution   | CO. SY | S/N. SY-110-100RM-A                                     |
| DR. Wakka 2012/11/06   | APPD.  | CHKD.   |
| Shiunn Yang Ent.Co.Ltd.<br>TEL: 29089890 <REP><br>FAX: 29068849,29088679 |        | FILE. SY-110-100RM-A<br>SCALE /<br>UNIT mm      SIZE A4 |
| 5  | 6      | 7   |