



Date	2007/11/28
Revision	A

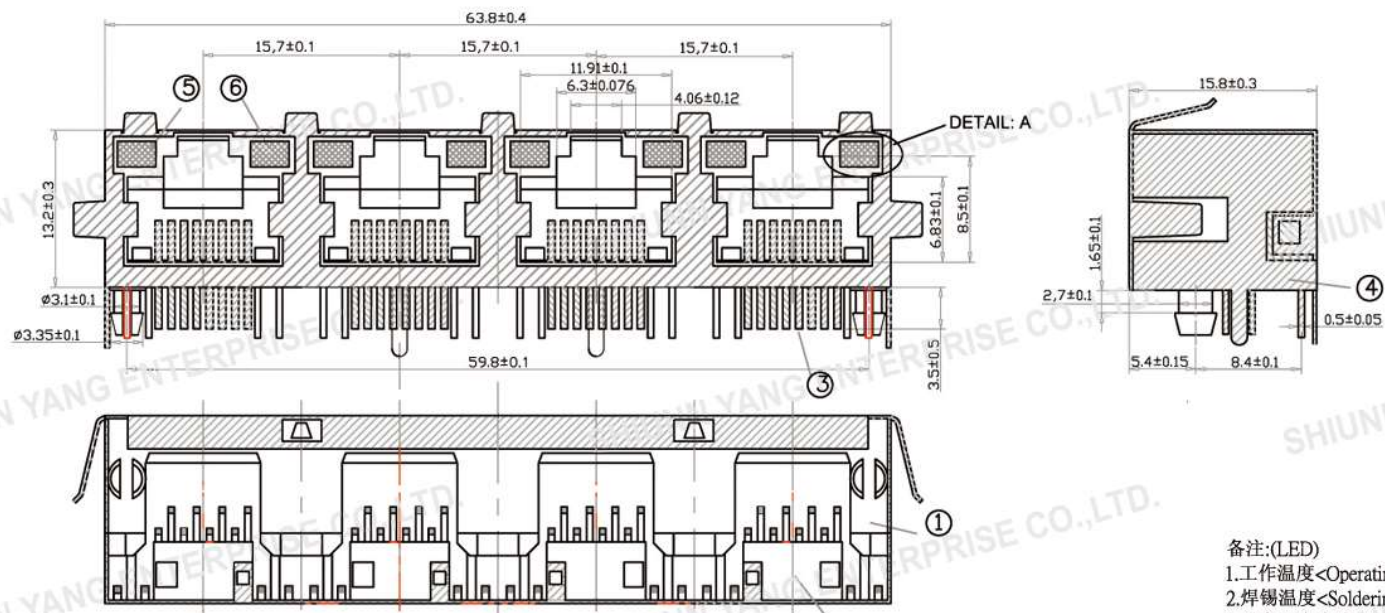

- 备注:(LED)
- 1.工作温度<Operating Temperature>: -40 to +85 °C
 - 2.焊锡温度<Soldering Temperature>: 260±5 °C 5秒
 - 3.最高正向电流<Peak Forward Current> (duty 1/10 @ 1KHz): 100mA 用IF表示
 - 4.反向电压<Reverse Voltage>: 5v 用vR表示
 - 5.正向电压<Forward Voltage>: 1.8~2.2V 条件IF=20mA
 6. 反向漏电流<Reverse Current>: 最大10uA 条件vR=5v

Tolerance unless other specified:±0.10



058-8P-4PORT 包鐵殼 有LED

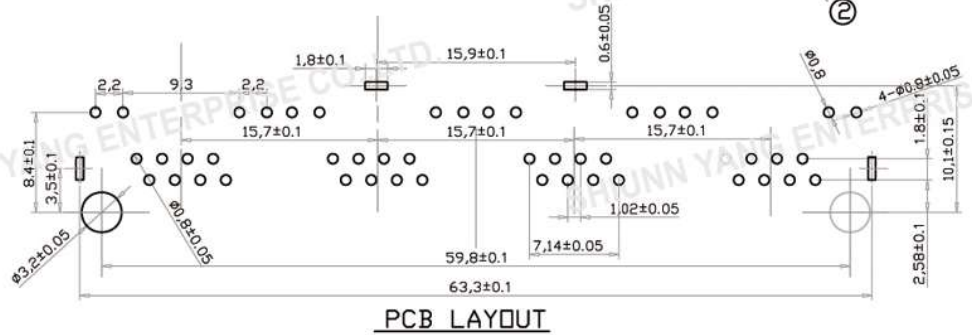

PCB LAYOUT

⑥	LED	—	??	4	ZE01001
⑤	LED	—	??	4	ZE01002
④	??	Cu	0.25MM?	1	ZJP058SX4-01
③	排端	Cu	8p	32	GPAEX0F-05
②	058	??	PBT	8P	IH058X18XXXX
		??	PBT	8P	IH058XX8XXXX
①	058 Jack	PBT	8P 4PORT ?LED	1	JH058XB8XX2XXXX-01
NO	NAME	MATERIAL	SPECIFICATION	QTY	REMARK

P/NO. JP058SB88X2XXXXX-02

ITEM.SHIELDED PCB JACK	CO.	FILE. JP058SB88X2XXXXX-02
DR. Breaker2007/11/28	APPD.	CHKD.
 Shiunn Yang Ent.Co.Ltd. TEL: 29089890 <REP> FAX: 29068849,29088679	SCALE /	
	UNIT mm	SIZE A4
	SHEET	REV.