
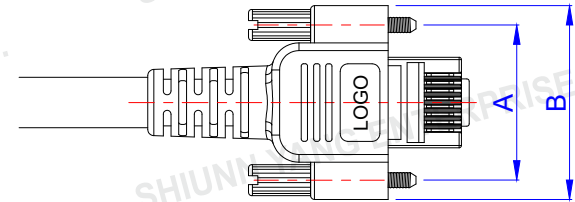
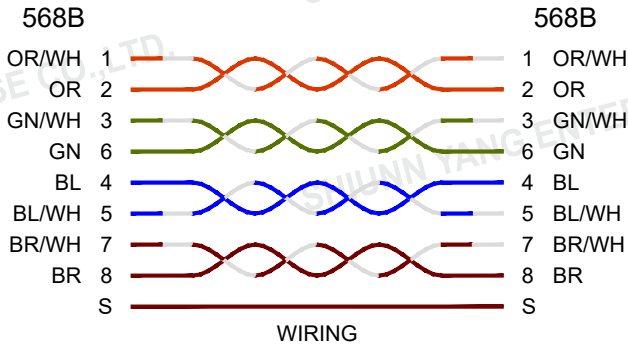


ROHS Compliant

Date	2020/05/25
Revision	A

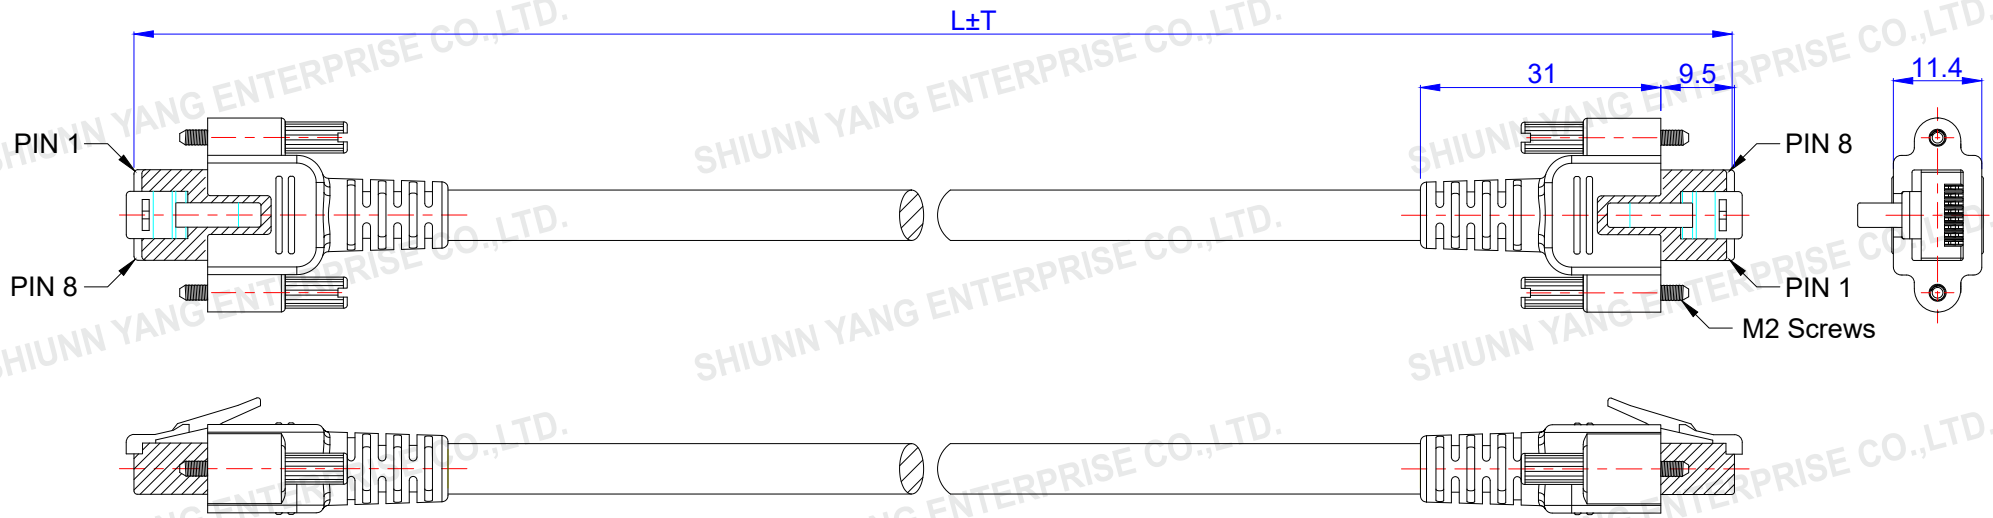

A	B
20 mm	25 mm
25 mm	30 mm
27 mm	33 mm

TOLERANCE

.XXX	0.10
.XX	0.25
.X	0.38

TECHNICAL DATA

CABLE LENGTH	<input type="checkbox"/> 500±30mm	<input type="checkbox"/> 1000±50mm	<input type="checkbox"/> 1500±50mm	<input type="checkbox"/> 2000±50mm
	<input type="checkbox"/> 2500±50mm	<input type="checkbox"/> 5000±50mm	<input type="checkbox"/> 10000±100mm	<input type="checkbox"/> OTHER _____
COLOR	<input type="checkbox"/> BLUE <input type="checkbox"/> ORANGE <input type="checkbox"/> RED <input type="checkbox"/> GREEN <input type="checkbox"/> WHITE <input type="checkbox"/> YELLOW <input type="checkbox"/> GRAY <input checked="" type="checkbox"/> OTHER <input type="checkbox"/> BLACK			
CABLE	S/FTP CAT.6A 26 AWG STRANDED PVC JACKET			
PLUG	8P8C 50u"			
SR TYPE	PCV			

P/NO. SSPC6A-X-BK-XX

ITEM. Patch Cord	CO. SY	FILE. SSPC6A-X-BK-XX
DR.	APPD. Sweet 2020/05/25	CHKD.



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29088679

S/N. SSPC6A-X-BK-XX
SCALE /
UNIT mm SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------