

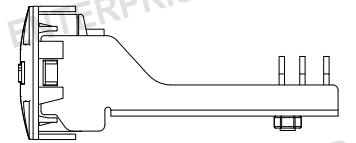
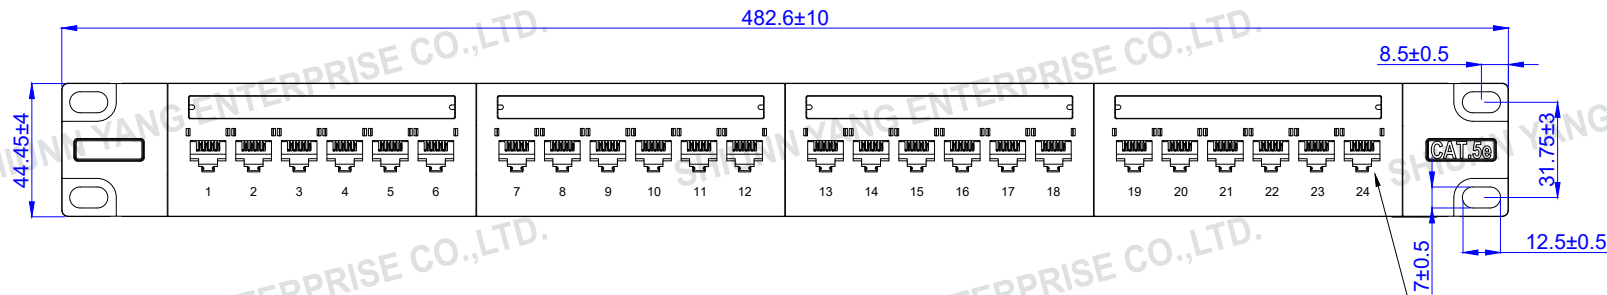


ROHS Compliant

DATE	2022/06/20
Revision	A

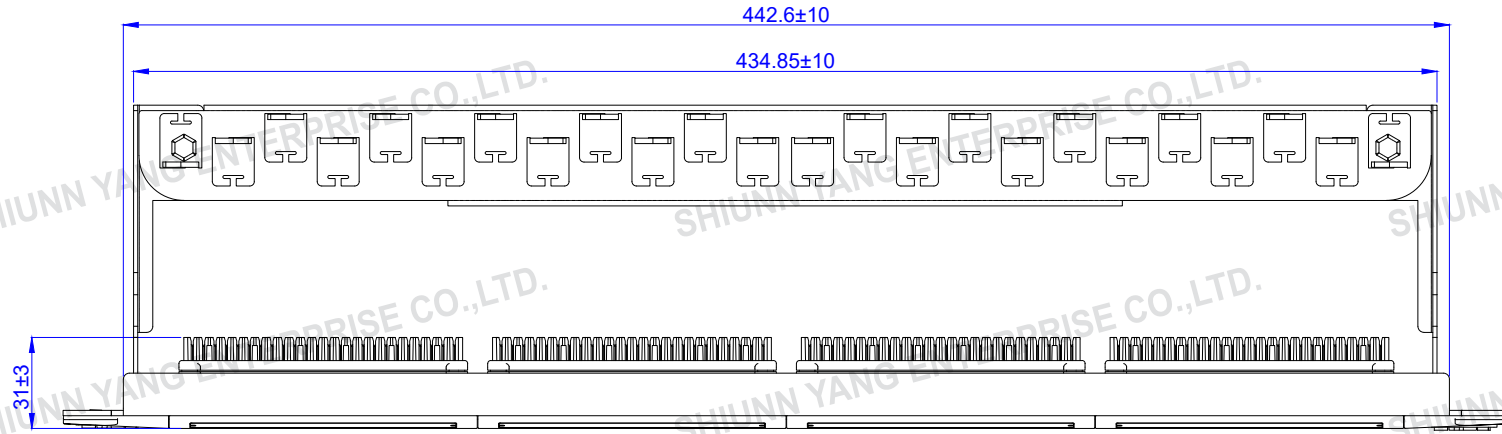

Features :


- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- 110/Krone dual IDC connector compatible
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature : -40°C~+60°C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

TOLERANCE	
.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL	
CATEGORY	<input checked="" type="checkbox"/> CAT.5E <input type="checkbox"/> CAT.6 <input type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____
FRAME	METALLIC SPCC + PC
IDC PLASTIC	PC, UL 94-V0
IDC CONTACT	PHOSPHOR BRONZE WITH 200U" TIN OVER NICKEL
CONTACT	0.35 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch <input type="checkbox"/> 0.15 um / 6u inch <input type="checkbox"/> 0.38 um / 15u inch <input type="checkbox"/> 0.76 um / 30u inch <input checked="" type="checkbox"/> 1.27 um / 50u inch
TYPE OF PRODUCT	<input checked="" type="checkbox"/> UNSHIELD <input type="checkbox"/> SHIELD : STAINLESS COVER
ACCESSORY	Black dust cover X 24pcs

P/NO. SY-508-24E-M	
ITEM. Patch Panel	CO. SY
DR.	APPD. Sweet 2022/06/20
S/N. SY-508-24E-M	
FILE. SY-508-24E-M	
 Shiunn Yang Ent.Co.Ltd. TEL: 29089890 <REP> FAX: 29088679	
SCALE /	
UNIT mm	SIZE A4