
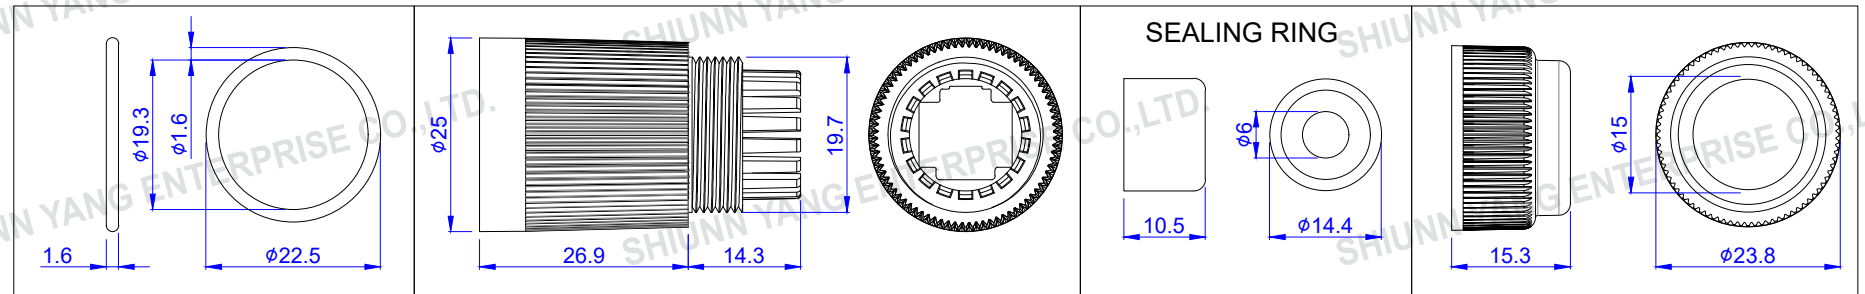




ROHS Compliant

Date	2023/10/05
Revision	A

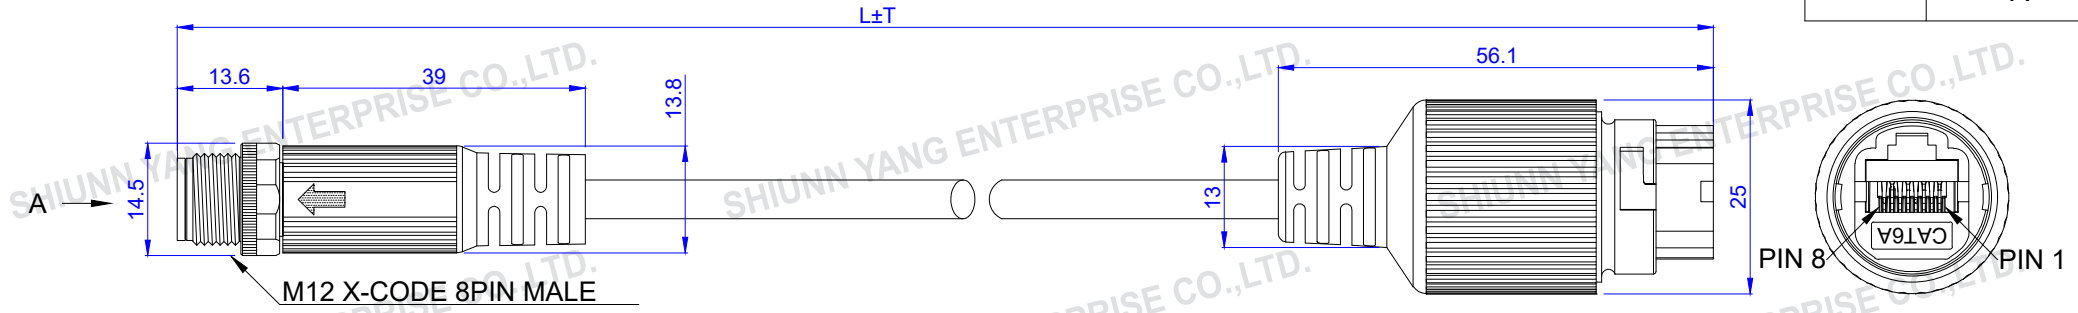

**ELECTR SPECIFICATION:**  
 RATED CURRENT : 0.5A  
 RATED VOLTAGE : 48V  
 WATER PROOD : IP67

**ENVIRONMENTAL :**  
 INSTALLATION TEMPERATURE 0°C~60°C  
 STORAGE TEMPERATURE -40°C~ 90°C  
 OPERATION TEMPERATURE -20°C~70°C

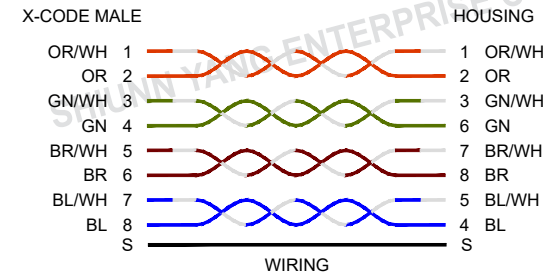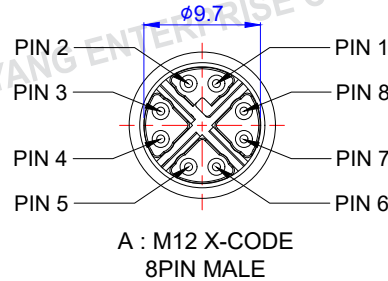

TOLERANCE	
.XXX	0.10
.XX	0.25
.X	0.38

TECHNICAL DATA

CABLE	S/FTP CAT6A 4P 26AWG STRANDED CABLE BLACK IN TPU JACKET
M12 X-CODE MALE	MOLDED HOOD: PVC 60% BLACK, IP67, 10u"
	HOUSING:PBT UL94V-0 BLACK ; CONTACT:BRASS ; NUT:BRASS ; SHELL:Zn ALLOY ; BACK SHELL:BRASS
	FINISH : CONTACT:10 MICRO INCHES MIN.GOLD PLATED ; UNDER PLATE:NICKEL ; NUT:NICKEL PLATED
HOUSING	IP67, 50u" ; SR : PVC BLACK ; SEALING RING : Silica gel G

**P/NO. M12X-MWJ-XX-SF6A**

ITEM. M12 X-code	CO. SY	FILE. M12X-MWJ-XX-SF6A
DR.	APPD. Sweet 2023/10/05	CHKD.
 Shiunn Yang Ent.Co.Ltd. TEL: 29089890 <REP> FAX: 29088679	S/N. M12X-MWJ-XX-SF6A	SCALE / 
	UNIT mm	SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------