


ROHS Compliant

Date 2023/11/10

Revision A

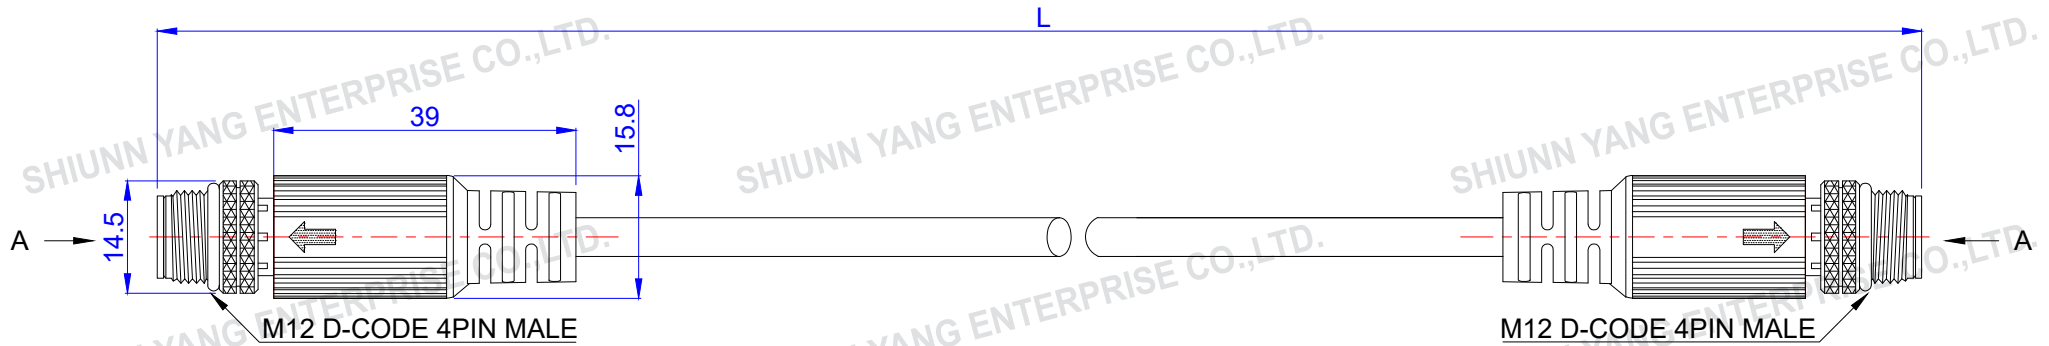


ELECTRICAL SPECIFICATION :


RATED CURRENT : 5A
 RATED VOLTAGE : 125V
 WATER PROOF : IP67

ENVIRONMENTAL :

INSTALLATION TEMPERATURE 0°C~50°C
 STORAGE TEMPERATURE -20°C~75°C
 OPERATION TEMPERATURE -10°C~60°C

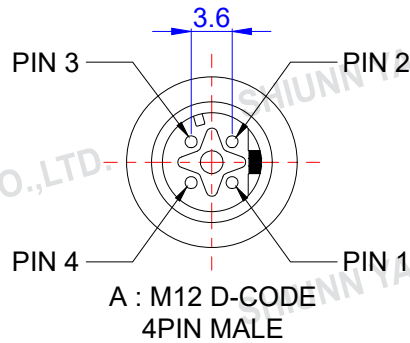

D-code MALE

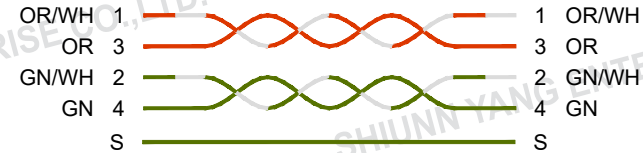

WIRING

TOLERANCE

.XXX	0.10
.XX	0.25
.X	0.38

TECHNICAL DATA

CABLE FTP CAT.5e 4P 26AWG STRANDED CABLE BLACK IN CMX PVC OUTDOOR JACKET

M12 D-code MALE

MOLDED HOOD: PVC 60% BLACK

HOUSING: PBT UL94V-0 BLACK ; CONTACT : BRASS ; NUT : BRASS ; O-RING : EPDM BLACK ; SHELL : BRASS

FINISH: CONTACT COLD 10u" ; UNDER PLATE: NICKED ; NUT: NICKED NI PLATED ; SHELL: BRIGHT TIN PLATED

P/NO. M12D-MM-XX-FPCe

ITEM. Patch Cord

CO. SY

FILE. M12D-MM-XX-FPCe

DR.


APPD. Sweet 2023/11/10

CHKD.



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29088679

S/N. M12D-MM-XX-FPCe



SCALE / UNIT mm SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------