


ROHS Compliant

DATE	2023/12/27
Revision	C

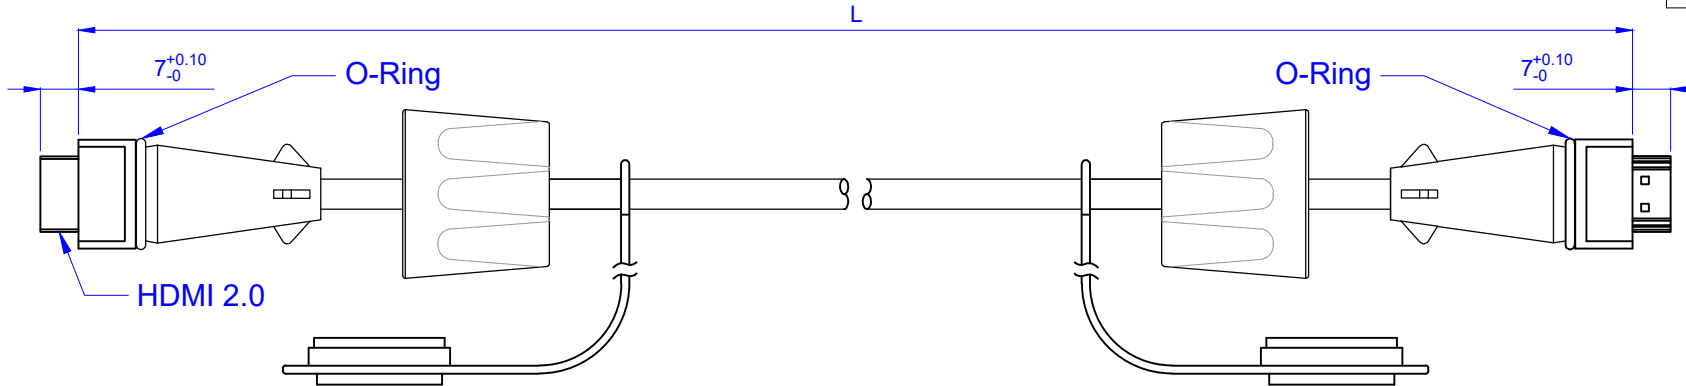




PCHYSICAL CHARACTERISTICS
 OPERATING TEMPERATURE RANGE : -24°C TO 85°C
 HUMIDITY : 10%-90%RH.

ELECTRIC TESTING
 100% OPEN & SHORT TESTING.
 INULATION RESISTANCE : 20 MΩ.
 CONDUCTOR RESISTANCE : 3 Ω.
 VOLTAGE : 300V DC/0.1S.

NOTE
 HDMI 2.0

IP68
 ACCORDING TO IEC 60529
 Degrees of Protection Provided by Enclosures
 6:Dust-tight
 8:Protected from immersion in water for 60 minutes
 at a depth of 1.5 meter.

CONNECTION

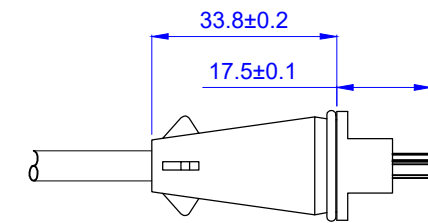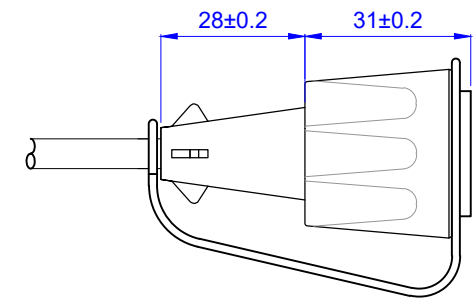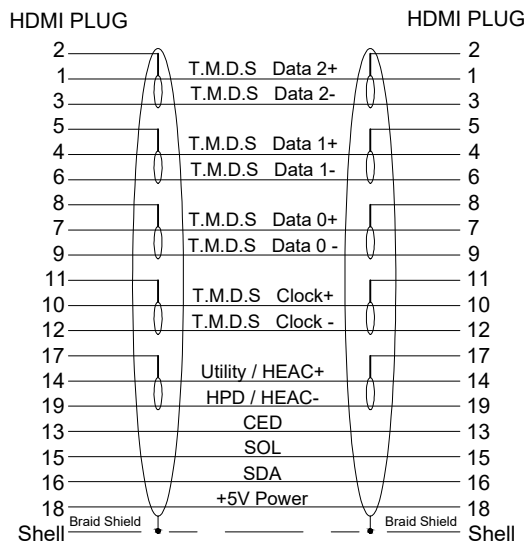

MATERIAL

CABLE SPEC	HDMI CABLE {(30AWGx2C+EAM)x5P+30AWGx4C}+AL/MY+Braid
HOOD	PVC 60P,UL94V-0
DUSTPROOF CAP	PVC, BLACK
SCREW	PVC, BLACK
O-RING	EPDM RUBBER, BLACK

P/NO. SY-HDMI-X-BK-WP

ITEM.	CO. SY	S/N. SY-HDMI-X-BK-WP
DR.	APPD. Sweet 2023/12/27	CHKD.



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29088679

FILE. SY-HDMI-X-BK-WP
SCALE /
UNIT mm SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
1			